

COR 75 PERFORMANCE HIDDEN SASH

**PERFORMANCE
HARDWARE**


Transmittance

 $U_w \geq 0.71$ (W/m²K)

Consult typology, dimensions and glass.

Acoustic insulation

 Maximum glazing **44 mm**

 Maximum acoustic insulation **Rw = 45 dB**

Sightlines

Frame	75 mm
Sash	77 mm

Profile Thickness

Window	1.8 mm
--------	--------

Maximum sash dimensions

Width (L) = 1,300 mm

Height (H) = 3,000 mm

Consult maximum dimensions according to typologies

Maximum sash weight 150 kg

Consult maximum weight according to typologies.

Categories achieved at test centre

Protection against atmospheric agents.

Air permeability

(UNE-EN 12207): Class 4

Watertightness

(UNE-EN 12208): Class E1650

Wind resistance

(UNE-EN 12210): Class E2600

* Reference test 1.23 x 1.48 m / 2 sashes.

Test verified by

ALUMINIOS CORTIZO S.A.U.

Extrusion alloy

6063 T-5

Finishes

Possibility of dual colour

Colour powder coating (RAL, mottled & rough)

According to Qualicoat >60 microns

Wood effect powder coating


According to Qualideco standard

Anodising

According to Ewva Euras / Standard Class 15 / Optionally Class 20 and 25

Opening possibilities

Inward opening: side hung, tilt & turn and bottom hung.

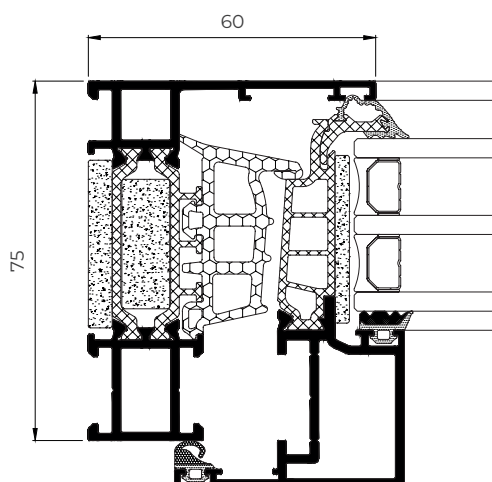

COR 75 PERFORMANCE VISIBLE SASH

PERFORMANCE
HARDWARE

Transmittance

$U_w \geq 0.71$ (W/m²K)

Consult typology, dimensions and glass.

Acoustic insulation

Maximum glazing **68 mm**

Maximum acoustic insulation **Rw = 45 dB**

Sightlines

Frame 75 mm
Sash 85 mm

Profile Thickness

Window 1.6 mm
Balcony door 1.8 mm

Polyamide strip length 40 mm

Maximum sash dimensions

Width (L) = 1,700 mm

Height (H) = 3,000 mm

Consult maximum dimensions according to typologies

Maximum sash weight 200 kg

Consult maximum weight according to typologies.

Categories achieved at test centre

Protection against atmospheric agents.

Air permeability

(UNE-EN 12207): Class 4

Watertightness

(UNE-EN 12208): Class E2100

Wind resistance

(UNE-EN 12210): Class E2600

* Reference test 1.23 x 1.48 m / 2 sashes.

Test verified by

ALUMINIOS CORTIZO S.A.U.

Extrusion alloy

6063 T-5

Finishes

Possibility of dual colour

Colour powder coating (RAL, mottled & rough)

According to Qualicoat >60 microns

Wood effect powder coating

According to Qualideco standard

Anodising

According to Ewva Euras / Standard Class 15 / Optionally Class 20 and 25

Opening possibilities

Inward opening: side hung, tilt & turn and bottom hung.

